创利宝全球最具影响力的包装机供应商

Chuanglibao: The World's Most Influential Packaging Machine Supplier.

佛山市创利宝包装机械有限公司

Foshan Chuanglibao Packaging Machinery Co., Ltd.

电话：广东省佛山市狮山镇罗村北湖一路19号江南工业园5幢6楼

ADD : 6th Floor, Building 5, Jiangnan Industrial Park, No. 19 North Lake 1st Road, Luocun, Shishan Town, Nanhai District, Foshan City, Guangdong Province, China

电话（Tel）： +86-757-81801948 **邮箱（E-mail）：** +86-757-81801948

传真（Fax）：+86-757-81801948 **网址（Website）：**www.chlbpack.com / https://chlbao.en.alibaba.com

创利宝®

CHUANGLIBAO

Pioneer of Full Servo Packing Machine

全伺服包装机开拓者

Intelligence Creates a Better Life

智能成就生活美

佛山市创利宝包装机械有限公司

Foshan Chuanglibao Packaging Machinery Co., Ltd.

COMPANY PROFILE
公司简介

佛山市创利宝包装机械有限公司自1998年起从事包装机械生产及销售，经20年的转研，我司产品广泛应用于食品、速冻食品、日用品、一次性用品、医药卫生、五金、农产品及化学品等行业的包装并赢得各方客户的青睐。

我司拥有自己的研发部门，致力于对技术及产品的创新。我们不仅生产包装机械，更为客户提供定制设计、改装等全面周到的服务。我们的产品皆通过CE认证并拥有多项技术专利，远销六大洲超过60个国家。我们还拥有专业的售后团队，为客户提供安装调试及全方位的技术支持。

前瞻未来，我们将继续致力于产品的改良及完善，坚持为我们的客户创造更大的价值，并与他们合作共赢。

Foshan Chuanglibao Packaging Machinery Co., Ltd. has been engaged in the production and sales of packaging machinery since 1998. After 20 years of transformation and research, our products are widely used in packaging in food, frozen food, daily necessities, disposable products, medical and health, hardware, agricultural products and chemicals industries and have won the favor of customers from all parties.

Our company has its own R&D department, committed to innovation in technology and products. We not only produce packaging machinery, but also provide customers with comprehensive and thoughtful services such as customized design and modification. Our products have passed CE certification and have multiple technical patents, and are exported to more than 60 countries on six continents. We also have a professional after-sales team to provide customers with installation and debugging and comprehensive technical support.

Looking forward to the future, we will continue to work hard to improve and improve our products, insist on creating greater value for our customers, and cooperate with them for win-win results.

公司愿景 COMPANY VISION

成为全球最具影响力的包装机供应商。

Become the world's most influential packaging machine supplier.

公司使命 COMPANY MISSION

让产品包装更安全。

Make product packaging safer.

公司精神 COMPANY SPIRIT

团队协作、勇于开拓、共创辉煌。

Team Collaboration, Bold Innovation, Sharing in Success.

公司价值观 COMPANYVALUES

诚信立本，服务至上。

Basic on sincerity and emphasis on services.

经营理念 COMPANY TENET

诚信、创新、共赢。

Sincerity - Innovation - Win-win.

包的好，创利宝！创造利润之宝

PACKING WELL, CHUANGLIBAO! CREATE YOUR PROFITS

PARTNERS 合作伙伴

企业历程 BUSINESS PROCESS

国家高新技术企业

- **2023** 研发推出超声波包装机，获得多项专利
  Developed and launched ultrasonic packaging machine and obtained multiple patents
- **2020** 研发推出快递气泡膜专用包装机
  Develop and launch a dedicated packaging machine for express bubble film
- **2018** 研发推出不定长蔬菜包装机
  R&D launches variable length vegetable packaging machine
- **2016** 研发推出第四代枕式机型：往复式全伺服包装机
  Research and development launch of the fourth generation pillow type model: reciprocating full service packaging machine
- **2013** 研发推出第三代枕式机型：全伺服包装机
  R&D launches the third generation pillow type model: full service packaging machine
- **2012** 荣获国家高新技术企业
  Awarded National High tech Enterprise
- **2011** 获评中国名企以及荣获中国信用企业认证体系示范单位
  Awarded as a Chinese Famous Enterprise and a Demonstration Unit of China's Credit Enterprise Certification System
- **2010** 成立佛山市森富智能包装设备有限公司
  Establishing Foshan Samfull Packaging Equipment Co., Ltd
- **2009** 成立佛山市森迅包装机械有限公司
  Establishing Foshan Senxun Packaging Machinery Co., Ltd
- **2008** 荣获 2008 中国烘焙最受欢迎设备品牌奖项
  Awarded the Most Popular Baking Equipment Brand Award in China in 2008
- **2006** 创利宝商标注册
  Chuanglibao trademark registration
- **2005** 研发推出第一代双变频枕式机
  R&D launches the first generation of dual frequency conversion pillow machine
- **2004** 创利宝公司成立
  Establishment of Chuanglibao Company

起心动念是为客户创造利益的产品

专利&证书

CERTIFICARES & PATENTS

创利宝®
CHUANGLIBAO

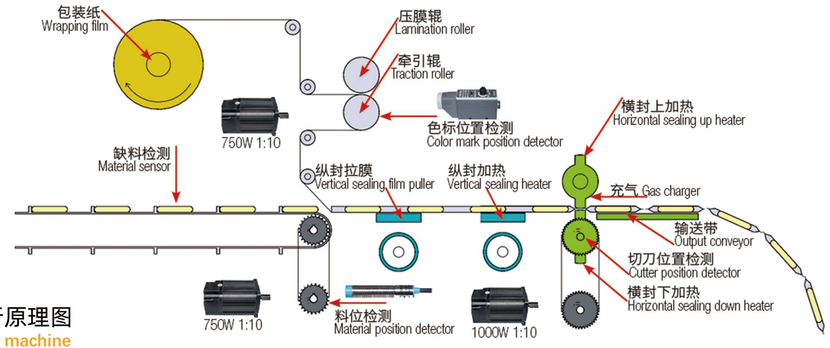

上走膜枕式机运行原理图
Up paper flow packing machine

枕式机运行原理图
FLOW CHART OF FLOW PACKING MACHINE

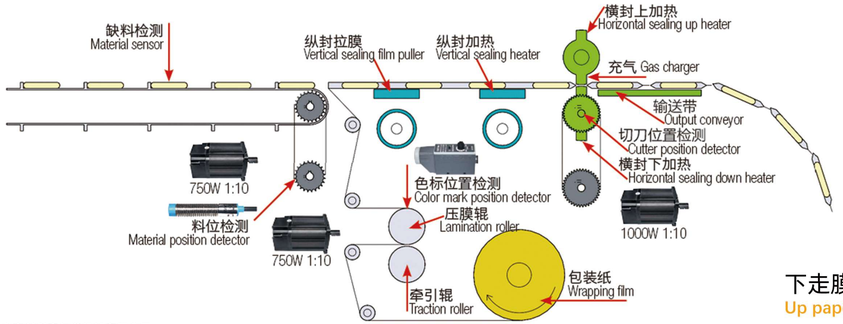

下走膜枕式机运行原理图
Up paper flow packing machine

CONTENTS
产品目录

创利宝简介 About Chuanglibao 02/03

企业历程/ 目录 Company Profile 04/07

08/09 多功能枕式包装机 Multifunctional bottom film pillow packaging machine
10/11 多功能枕式包装机 Multifunctional bottom film pillow packaging machine
12/13 挤泥枕式包装机 Dough Extruder and Packing Machine
14/15 装杯机 Dough cupExtruding Filling Capping Packing Machine
16/17 十二色挤泥机 12 Color Multi-Functional Plasticine Packing Machine
18/19 膏体包装机 Automatic Paste Packing Machine
20/21 大立式多头秤包装机 Automatic VFFS Packing Machine with Multihead Weigher
22/23 大立式粉末包装机 Automatic VFFS Packing Machine with Auger Filler
24/25 大立式量杯包装机 Automatic VFFS Packing Machine with Volumetric Cup Filler
26/27 热成型真空拉伸膜包装机 Thermoforming Vacuum Stretch Film Packaging Machine
28/29 气调真空包装机 Modified Atmosphere Packaging Machine
30/31 真空套袋机 Vacuum Bagging Machine
32/33 水平颗粒给袋机 Horizontal Granule Doypack Packing Machine
34/35 水平液体给袋机 Horizontal Liquid Doypack Packing Machine
36/37 水平粉末给袋机 Horizontal Powder Doypack Packing Machine
38/39 颗粒多头秤给袋机 Doypack machine with multiheads weigher
40/41 袜子套袋机 Socks zipper bag packaging machine
42/43 夹心饼干包装机 Sandwich biscuit packaging machine
44/45 转盘理料线 Turntable packaging line
46/47 全自动包装线 Packaging Line
48/49 挂耳式咖啡机 Drip Coffee Bag Packing Machine
50/51 三角袋茶叶包装机 Triangle bag tea packaging machine
52/53 吸嘴袋灌封机 Automatic Spout Pouch Filling Capping Machine
54/55 配套设备(立式机) upporting Equipment (Vertical Machine)

型号Model：CB-350XS 多功能枕式包装机

Multifunctional bottom film pillow packaging machine

高效率 High efficiency

更稳定 More stable

易操作 Easy to operate

视频网站：https://youtu.be/MXzjjotakpo

Video URL translation

扫码观看：

Scan to watch

CHUANGLIBAO

创利宝全球最具影响力的包装机供应商

Chuanglibao: The World's Most Influential Packaging Machine Supplier.

技术参数 TECHNICAL SPECIFICATIONS

型号Model	CB-350XS
输出 Output	高达每分钟200件产品;高达40米/分钟的薄膜速度;产品和薄膜特性可能会影响机器输出 Up to 200 products per minute; Up to 40 m/min film speed; Product and film characteristic may affect machine out put
包装尺寸长度 Package cut-off length	50-6000mm
产品宽度 Product width	Max.140mm
产品高度 Product height	Max.60mm
卷轴直径 Reel diameter	≤350mm
核心直径 Core diameter	≤65mm
包装材料宽度 Packaging material width	Max.350mm
重量 Weight	Max.25kg
电压 Voltage	220V 50/60Hz 2.8KW
电力使用 Power usage	2.8KW
机器重量 Machine weight	650kg
机器尺寸 Machine dimensions	L4020mm*W820mm*H1320mm
刀片切割类型 Blade cut type	Rotary cutter
电机配置 Motor configuration	Triple servo
可选设备 Optional Device	Date printer, auto feeder, gas charger, etc.

包装材料 PACKAGING

聚丙烯/聚乙烯，铝箔/聚乙烯，纸/聚乙烯等。

BOPP/Polyethylene, Aluminium/Polyethylene, Paper/Polyethylene,etc.

适用包装范围 APPLICATION

主要适用于尿布、链条、面包、食品、商品、五金等具有常规尺寸的固体物体包装。

Suitable for the diaper, chain, bread, food, commodities, hardware and other solid objects with rgular size..

产品性能特点 PERFORMANCE FEATURES

1. 三台伺服电机，PLC控制，袋长立即设置并切割
   Three servo motors, PLC controlled, bag length set and cut immediately
2. 人机界面，参数设置方便快捷
   Human-machine interface, convenient and fast parameter setting
3. 故障自诊断段功能，故障显示一目了然。
   Three servo motors, PLC controlled, bag length set and cut immediately
4. 先进的光电眼彩色标记跟踪，数字输入密封和切割位置，更加准确
   Human-machine interface, convenient and fast parameter setting
5. 温度独立的PID控制，更好地适用于各种包装材料
   Three servo motors, PLC controlled, bag length set and cut immediately
6. 定位停止功能，无粘刀，无薄膜浪费
   Human-machine interface, convenient and fast parameter setting
7. 传动系统简单，工作更可靠，维护更方便。
   Three servo motors, PLC controlled, bag length set and cut immediately
8. 所有控件均由软件实现，方便功能调整和技术升级，永不落后
   Human-machine interface, convenient and fast parameter setting
9. 自动感应物料长度，自动包装产品，无产品停止等待,无需调整袋长
   Three servo motors, PLC controlled, bag length set and cut immediately

型号Model：CB-350S 多功能枕式包装机

Multifunctional bottom film pillow packaging machine

高效率 High efficiency

更稳定 More stable

易操作 Easy to operate

视频网站：https://youtu.be/y0uD4JSotW4

Video URL translation

扫码观看：

Scan to watch

技术参数 TECHNICAL SPECIFICATIONS

型号Model	CB-350S
输出 Output	高达每分钟200件产品;高达40米/分钟的薄膜速度;产品和薄膜特性可能会影响机器输出 Up to 200 products per minute Up to 40 m/min film speed Product and film characteristic may affect machine output
包装尺寸长度 Package cut-off length	50-6000mm
产品宽度 Product width	Max.140mm
产品高度 Product height	Max.60mm
卷轴直径 Reel diameter	≤350mm
核心直径 Core diameter	≤65mm
包装材料宽度 Packaging material width	Max.350mm
重量 Weight	Max.25kg
电压 Voltage	220V 50/60Hz 2.8KW
电力使用 Power usage	2.8KW
机器重量 Machine weight	650kg
机器尺寸 Machine dimensions	L4020mm*W820mm*H1320mm
刀片切割类型 Blade cut type	Rotary cutter
电机配置 Motor configuration	Triple servo
可选设备 Optional Device	Date printer, auto feeder, gas charger, etc.

包装材料 PACKAGING

聚丙烯/聚乙烯，铝箔/聚乙烯，纸/聚乙烯等。

BOPP/Polyethylene, Aluminium/Polyethylene, Paper/Polyethylene,etc.

适用包装范围 APPLICATION

主要适用于尿布、链条、面包、食品、商品、五金等具有常规尺寸的固体物体包装。

Suitable for the diaper, chain, bread, food, commodities, hardware and other solid objects with rgular size..

产品性能特点 PERFORMANCE FEATURES

1. 三台伺服电机，PLC控制，袋长立即设置并切割
   Three servo motors, PLC controlled, bag length set and cut immediately
2. 人机界面，参数设置方便快捷
   Human-machine interface, convenient and fast parameter setting
3. 故障自诊断段功能，故障显示一目了然。
   Three servo motors, PLC controlled, bag length set and cut immediately
4. 先进的光电眼彩色标记跟踪，数字输入密封和切割位置，更加准确
   Human-machine interface, convenient and fast parameter setting
5. 温度独立的PID控制，更好地适用于各种包装材料
   Three servo motors, PLC controlled, bag length set and cut immediately
6. 定位停止功能，无粘刀，无薄膜浪费
   Human-machine interface, convenient and fast parameter setting
7. 传动系统简单，工作更可靠，维护更方便。
   Three servo motors, PLC controlled, bag length set and cut immediately
8. 所有控件均由软件实现，方便功能调整和技术升级，永不落后
   Human-machine interface, convenient and fast parameter setting
9. 自动感应物料长度，自动包装产品，无产品停止等待,无需调整袋长
   Three servo motors, PLC controlled, bag length set and cut immediately

型号Model：CB-350XL

挤泥枕式包装机
Dough Extruder and Packing Machine

高效率 High efficiency

更稳定 More stable

易操作 Easy to operate

视频网站：https://youtu.be/cU2MCg4Sbm8
Video URL translation

扫码观看：
Scan to watch



技术参数 TECHNICAL SPECIFICATIONS

型号Model	CB-350XL
输出 Output	每分钟最多150个袋子 (产品和电影特征可能会影响机器输出) Up to 150 bags per minute(Product and film characteristic may affect machine output)
包装尺寸长度 Package cut-off length	60-200mm
产品宽度 Product width	20-165mm
产品高度 Product height	20-60mm
卷轴直径 Reel diameter	≤300mm
核心直径 Core diameter	≤75mm
包装材料宽度 Packaging material width	Max.350mm
重量 Weight	Max.11kg
电压 Voltage	380V 50Hz 7KW
电力使用 Power usage	7KW
机器重量 Machine weight	880kg
机器尺寸 Machine dimensions	L2300*W850*H1300mm
刀片切割类型 Blade cut type	Rotary cutter
电机配置 Motor configuration	Dual VFD (Servo Optional)
可选设备 Optional Device	Date printer, auto feeder, gas charger, etc.

包装材料 PACKAGING

聚丙烯/聚乙烯，铝箔/聚乙烯，纸/聚乙烯等。
BOPP/Polyethylene, Aluminium/Polyethylene, Paper/Polyethylene,etc.

适用包装范围 APPLICATION

主要适用于软质材料，如塑料泥、糖霜、面粉团、自然干燥黏土、造型黏土等物体包装。
Suitable for the soft material such as plasticine, sugar fondany,flour dough, air dry clay, modeling clay,etc.

产品性能特点 PERFORMANCE FEATURES

1. 食品级SUS#304接触件
   Food grade SUS#304 contact parts
2. 两个彩色触摸屏7英寸，一个用于包装机，另一个用于挤出机
   Two color touch screen 7", one for packing machine, another for extruder.
3. 可以挤出不同的产品形状
   Can extruder out different product shapes
4. 安全警示
   With safety guards
5. 准确的切割
   Accurate length cutting
6. 具有技术专利
   With technical patent
7. 易于操作和清洁
   Easy to operate and clean
8. 切割部件可根据不同材料进行更换
   Cutting can be change for different material
9. 可改装为伺服控制
   Can be modified to servo control

型号Model：CB-40B

装杯机 Dough Cup
Extruding Filling Capping Packing Machine

高效率 High efficiency

更稳定 More stable

易操作 Easy to operate

视频网站：https://youtu.be/Zuo_l-aPuiA
Video URL translation

扫码观看：
Scan to watch

技术参数 TECHNICAL SPECIFICATIONS

型号Model	CB-40B
输出 Output	每分钟最多可生产60杯产品(产品特性和长度可能会影响机器的输出) Up to 60 products per minute Product characteristic and length may affect machine output
包装类型 Packing Type	Cup
包装范围 Packing Range	30-120g
功率 Power	220V 50HZ 3KW
气压 Air Pressure	0.6 - 0.85Mpa
容量 Capacity	30~40cups/min
燃气消耗 Gas Consumption	0.45 M^3/min
机器重量 Machine weight	1000kg
机器尺寸 Machine dimensions	L3500*W1200*H2205mm

包装材料 PACKAGING

聚丙烯/聚乙烯，铝箔/聚乙烯，纸/聚乙烯等。
BOPP/Polyethylene, Aluminium/Polyethylene, Paper/Polyethylene,etc.

适用包装范围 APPLICATION

主要适用于软质材料，如彩泥杯子包装的生产包装。
Suitable for packaging soft materials, like play dough cup packaging.

产品性能特点 PERFORMANCE FEATURES

1. 挤泥、送料、切割、放入杯子、封膜（或加盖），所有步骤都在一台机器中完成
   Extruding mud, feeding, cutting, putting cups, sealing film(or capping) all in onemachine.
2. 操作简便，易于清洁
   Easy operation and clean
3. 精确的长度切割
   Accurate length cutting
4. 食品级不锈钢接触件
   Food grade stainless steel contact parts
5. 机械手，精确定位
   Robotic hand, accurate positioning
6. 产品重量易于调整
   Easy to change product weight
7. 7英寸触摸屏
   7" Touch screen
8. 切割部件可根据不同材料进行更换
   Full automatic operation, avoid human intervention
9. 全自动操作，避免人为干预
   Can be modified to servo control

型号Model：CB-350XL 十二色挤泥机

12 Color Multi-Functional Plasticine Packing Machine

高效率 High efficiency

更稳定 More stable

易操作 Easy to operate

视频网站： https://youtu.be/lrlJVz4rz8s

Video URL translation

扫码观看：

Scan to watch

技术参数 TECHNICAL SPECIFICATIONS

型号Model	CB-350XL
输出 Output	每分钟最多可生产150件产品（产品特性和长度可能会影响机器的输出） Up to 150 products per minute Product characteristic and length may affect machine output
包装尺寸长度 Package cut-off length	60-200mm
产品宽度 Product width	20-165mm
产品高度 Product height	20-60mm
卷轴直径 Reel diameter	≤300mm
核心直径 Core diameter	≤75mm
包装材料宽度 Packaging material width	Max.350mm
重量 Weight	Max.11kg
电压 Voltage	380V 50Hz 7KW
电力使用 Power usage	7KW
机器重量 Machine weight	880kg
机器尺寸 Machine dimensions	L1550*W1000*H1350mm
刀片切割类型 Blade cut type	Rotary cutter
电机配置 Motor configuration	Dual VFD (Servo Optional)
可选设备 Optional Device	Date printer, auto feeder, gas charger, etc.

包装材料 PACKAGING

聚丙烯/聚乙烯，铝箔/聚乙烯，纸/聚乙烯等。

BOPP/Polyethylene, Aluminium/Polyethylene, Paper/Polyethylene,etc.

适用包装范围 APPLICATION

主要适用于软质材料，如塑料泥、糖霜、面粉团、自然干燥黏土、造型黏土等物体包装。

Suitable for the soft material such as plasticine, sugar fondany,flour dough, air dry clay, modeling clay,etc.

产品性能特点 PERFORMANCE FEATURES

1. 食品级SUS#304接触件
   Food grade SUS#304 contact parts
2. 7英寸双色触摸屏，一个用于包装机，另一个用于挤出机
   Two color touch screen 7", one for packing machine, another for extruder
3. 可以生产不同形状的产品
   Can extruder out different product shapes
4. 带有安全防护装置
   With safety guards
5. 精确的长度切割
   Accurate length cutting
6. 拥有技术专利
   With technical patent
7. 操作简便，易于清洁
   Easy to operate and clean
8. 切割部件可根据不同材料进行更换
   Cutting can be change for different material
9. 可改装为伺服控制
   Can be modified to servo control

型号Model：CB-720GT

膏体包装机
Automatic paste packing machine

高效率 High efficiency

更稳定 More stable

易操作 Easy to operate

视频网站：https://youtu.be/jRy4SNYLlI0
Video URL translation

扫码观看：
Scan to watch

技术参数 TECHNICAL SPECIFICATIONS

型号Model	CB-720GT
输出 Output	每分钟最多可生产70件产品（产品特性和长度可能会影响机器的输出） Up to 70 products per minute Product characteristic and length may affect machine output
包装尺寸长度 Packaging length	200-500mm
包装尺寸宽度 Packaging width	125-300mm
包装范围 Packaging range	500g-5000g
卷轴最大宽 Maximum roll width	≤720mm
卷膜材质 Film roll material	NL/PE(9-12mm thick)
袋型 Bag type	Pillow bag
包装速度 Packaging speed	10-70bags/min
电压 Voltage	packing machine 220V Pump 380V
功率 Power	packing machine 3KW Pump 7.5KW
机器重量 Machine weight	800kg
机器尺寸 Machine dimensions	L4105*W2457*H3530mm
耗气量 Air consumption	0.6MPa/0.3m^3
电机配置 Motor configuration	Dual servo
可选设备 Optional Device	Weight selection scale/ Coding machine

包装材料 PACKAGING

聚丙烯/聚乙烯，铝箔/聚乙烯，纸/聚乙烯等。
BOPP/Polyethylene, Aluminium/Polyethylene, Paper/Polyethylene,etc.

适用包装范围 APPLICATION

主要适用于食品工业和化工行业，液体高粘度物料的计量和包装如:豆沙、莲蓉、水果馅、沙拉酱、包子馅、肉馅、水果块、糯米胶、果冻胶油漆、油脂、非食品洗涤剂等液体的包装。
It is mainly suitable for the food industry and chemical industry, and the measurement and packaging of liquid high-viscosity materials such as: bean paste, lotus paste, fruit filling, salad dressing, bun filling, meat filling, fruit blocks, glutinous rice glue, jelly glue paint, oil, non-food detergent and other liquid packaging.

产品性能特点 PERFORMANCE FEATURES

1. 食品级SUS#304接触件
   Food grade SUS#304 contact parts
2. 独立的温控系统，封口美观
   An independent temperature control system ensures a visually appealing seal
3. 机械设有故障显示系统，可帮助及时排除故障
   Equipped with a fault display system, it enables troubleshooting and fault elimination
4. 配备安全防护，符合企业安全管理要求
   Equipped with safety protection, it meets the safety requirements
5. 拉膜系统及色标控制系统，可通过触摸屏自动调整
   The film pulling and color mark control system can be adjusted via a touch screen
6. 拥有技术专利，符合食品 QS 和医药 GMP 卫生标准
   Possessing technical patents, it complies with QS and GMP standards
7. 操作简便，易于清洁
   Easy to operate and clean
8. 可根据客户需要制成枕式袋、插脚袋、打挂孔袋、连包袋
   IIt can produce pillow bags, side-gusseted bags, punch-hole bags, etc.
9. 整机采用封闭式结构，有效防止粉坐进入机器
   The entire machine adopts a closed structure to effectively prevent powder from entering

型号Model：CB-520PM

大立式多头秤包装机
Automatic vffs packing machine with multihead weigher

高效率 High efficiency

更稳定 More stable

易操作 Easy to operate

视频网站：https://youtu.be/YQwTugijWxE
Video URL translation

扫码观看：
Scan to watch

技术参数 TECHNICAL SPECIFICATIONS

型号Model	CB-520PM
输出 Output	每分钟最多可生产55件产品（产品特性和长度可能会影响机器的输出） Up to 55 products per minute Product characteristic and length may affect machine output
包装尺寸长度 Packaging length	40-100mm
包装尺寸宽度 Packaging width	25-100mm
包装范围 Packaging range	20g-500g
卷膜最大宽 Maximum roll width	520mm
卷膜材质 Film roll material	PET/MPET/PE 80 micron
袋型 Bag type	Pillow bag
包装速度 Packaging speed	5-55 bags/min
电压 Voltage	220V 50Hz
功率 Power	3.5KW
机器重量 Machine weight	720kg
机器尺寸 Machine dimensions	L4105*W2457*H3750mm
耗气量 Air consumption	0.65MPa/0.3m^3
电机配置 Motor configuration	Dual servo
可选设备 Optional Device	Weight selection scale/ Coding machine

包装材料 PACKAGING

聚丙烯/聚乙烯，铝箔/聚乙烯，尼龙/增强型聚乙烯，纸/聚乙烯等。
Polypropylene/Polyethylene, Aluminum Foil/Polyethylene, Nylon/Reinforced Polyethylene, Paper/Polyethylene, etc.

适用包装范围 APPLICATION

主要适用于不规则块状和颗粒状物料的计量包装，如糖果、膨化食品、小饼干、炒货干果、砂糖、速冻食品及五金塑料产品等。
Mainly suitable for the measurement and packaging of irregularly shaped block and granular materials, such as candies, puffed snacks, small cookies, roasted nuts and dried fruits, sugar, frozen food, and hardware plastic products, etc.

产品性能特点 PERFORMANCE FEATURES

1. 食品级SUS#304接触件
   Food grade SUS#304 contact parts
2. 独立的温控系统，封口美观
   An independent temperature control system ensures a visually appealing seal
3. 机械设有故障显示系统，可帮助及时排除故障
   Equipped with a fault display system, it enables troubleshooting and fault elimination
4. 配备安全防护，符合企业安全管理要求
   Equipped with safety protection, it meets the safety requirements
5. 拉膜系统及色标控制系统，可通过触摸屏自动调整
   The film pulling and color mark control system can be adjusted via a touch screen
6. 拥有技术专利，符合食品 QS 和医药 GMP 卫生标准
   Possessing technical patents, it complies with QS and GMP standards
7. 操作简便，易于清洁
   Easy to operate and clean
8. 可根据客户需要制成枕式袋、插脚袋、打挂孔袋、连包袋
   IIt can produce pillow bags, side-gusseted bags, punch-hole bags, etc.
9. 整机采用封闭式结构，有效防止粉坐进入机器
   The entire machine adopts a closed structure to effectively prevent powder from entering

型号Model：CB-680PA

大立式粉末包装机
Automatic vffs packing machine with auger filler

高效率 High efficiency

更稳定 More stable

易操作 Easy to operate

视频网站：https://youtu.be/4X_zCzBBOH4
Video URL translation

扫码观看：
Scan to watch

技术参数 TECHNICAL SPECIFICATIONS

型号Model	CB-680PA
输出 Output	每分钟最多可生产55件产品 (产品特性和长度可能会影响机器的输出) Up to 55 products per minute Product characteristic and length may affect machine output
包装尺寸长度 Packaging length	80-480mm
包装尺寸宽度 Packaging width	50-330mm
包装范围 Packaging range	30g-5000g
卷膜最大宽 Maximum roll width	680mm
卷膜材质 Film roll material	OPP/CPP,OPP/PE,PET/PE,PE
袋型 Bag type	Pillow bag/Gusset bag/Quad seal bag
包装速度 Packaging speed	5-60bags/min
电压 Voltage	220V/380V 50Hz
功率 Power	3.5KW
机器重量 Machine weight	720kg
机器尺寸 Machine dimensions	L1150*W1795*H1650mm
耗气量 Air consumption	0.65MPa/0.4m^3
电机配置 Motor configuration	Dual servo
可选设备 Optional Device	Weight selection scale/ Coding machine

包装材料 PACKAGING

聚丙烯/聚乙烯，铝箔/聚乙烯，涤纶/镀铝/聚乙烯，尼龙/增强型聚乙烯，纸/聚乙烯等。

Polypropylene/Polyethylene, Aluminum Foil/Polyethylene, Polyester/Aluminum Coating/Polyethylene, Nylon/Reinforced Polyethylene, Paper/Polyethylene, etc.

适用包装范围 APPLICATION

主要适用于粉体物料的计量包装，如面粉、肠粉、咖啡粉、奶粉、奶茶粉、调味料及建材粉末产品等。

Mainly used for the measurement and packaging of powder materials, such as flour, rice noodle, coffee powder, milk powder, milk tea powder, seasoning, building material powder products, etc.

产品性能特点 PERFORMANCE FEATURES

1. 食品级SUS#304接触件
   Food grade SUS#304 contact parts
2. 独立的温控系统，封口美观
   An independent temperature control system ensures a visually appealing seal
3. 机械设有故障显示系统，可帮助及时排除故障
   Equipped with a fault display system, it enables troubleshooting and fault elimination
4. 配备安全防护，符合企业安全管理要求
   Equipped with safety protection, it meets the safety requirements
5. 拉膜系统及色标控制系统，可通过触摸屏自动调整
   The film pulling and color mark control system can be adjusted via a touch screen
6. 拥有技术专利，符合食品 QS 和医药 GMP 卫生标准
   Possessing technical patents, it complies with QS and GMP standards
7. 操作简便，易于清洁
   Easy to operate and clean
8. 可根据客户需要制成枕式袋、插脚袋、打挂孔袋、连包袋
   IIt can produce pillow bags, side-gusseted bags, punch-hole bags, etc.
9. 整机采用封闭式结构，有效防止粉坐进入机器
   The entire machine adopts a closed structure to effectively prevent powder from entering

型号Model：CB-720PM

大立式量杯包装机

Automatic vffs packing machine with volumetric cup filler

高效率 High efficiency

更稳定 More stable

易操作 Easy to operate

视频网站：https://youtu.be/J02JG7WBQsY
Video URL translation

扫码观看：
Scan to watch

技术参数 TECHNICAL SPECIFICATIONS

型号Model	CB-720PM
输出 Output	每分钟最多可生产30件产品 (产品特性和长度可能会影响机器的输出) Up to 30 products per minute Product characteristic and length may affect machine output
包装尺寸长度 Packaging length	100-480mm
包装尺寸宽度 Packaging width	150-350mm
包装范围 Packaging range	30g-5000g
卷膜最大宽 Maximum roll width	720mm
卷膜材质 Film roll material	OPP/CPP,OPP/PE,PET/PE,PE
袋型 Bag type	Pillow bag/Gusset bag/Quad seal bag
包装速度 Packaging speed	20-30bags/min
电压 Voltage	380V 50-60Hz
功率 Power	5.75KW
机器重量 Machine weight	1100kg
机器尺寸 Machine dimensions	L3980*W2250*H4200mm
耗气量 Air consumption	0.65MPa/0.6m^3
电机配置 Motor configuration	Dual servo
可选设备 Optional Device	Weight selection scale/ Coding machine

包装材料 PACKAGING

聚丙烯/聚乙烯，铝箔/聚乙烯，涤纶/镀铝/聚乙烯，尼龙/增强型聚乙烯，纸/聚乙烯等。

Polypropylene/Polyethylene, Aluminum Foil/Polyethylene, Polyester/Aluminum Coating/Polyethylene, Nylon/Reinforced Polyethylene, Paper/Polyethylene, etc.

适用包装范围 APPLICATION

主要适用于规则颗粒状的计量包装，如白砂糖、大豆、大米、玉米粒、海盐、食用盐及塑料粒产品等。

Mainly suitable for the measurement and packaging of regularly granulated products, such as white sugar, soybeans, rice, corn kernels, sea salt, edible salt, and plastic pellet products, etc.

产品性能特点 PERFORMANCE FEATURES

1. 食品级SUS#304接触件
   Food grade SUS#304 contact parts
2. 独立的温控系统，封口美观
   An independent temperature control system ensures a visually appealing seal
3. 机械设有故障显示系统，可帮助及时排除故障
   Equipped with a fault display system, it enables troubleshooting and fault elimination
4. 配备安全防护，符合企业安全管理要求
   Equipped with safety protection, it meets the safety requirements
5. 拉膜系统及色标控制系统，可通过触摸屏自动调整
   The film pulling and color mark control system can be adjusted via a touch screen
6. 拥有技术专利，符合食品 QS 和医药 GMP 卫生标准
   Possessing technical patents, it complies with QS and GMP standards
7. 操作简便，易于清洁
   Easy to operate and clean
8. 可根据客户需要制成枕式袋、插脚袋、打挂孔袋、连包袋
   IIt can produce pillow bags, side-gusseted bags, punch-hole bags, etc.
9. 整机采用封闭式结构，有效防止粉坐进入机器
   The entire machine adopts a closed structure to effectively prevent powder from entering

型号Model：CB-320

热成型真空拉伸膜包装机

Thermoforming Vacuum Stretch Film Packaging Machine

高效率 High efficiency

更稳定 More stable

易操作 Easy to operate

视频网站：https://youtu.be/sl_-avpT-Sk

Video URL translation

扫码观看：

Scan to watch

技术参数 TECHNICAL SPECIFICATIONS

型号Model	CB-320
输出 Output	每分钟最多可生产40件产品 (产品特性和长度可能会影响机器的输出) Up to 40 products per minute Product characteristic and length may affect machine output
包装尺寸长度 Packaging length	According to product size
包装尺寸宽度 Packaging width	According to product size
真空 Vacuum	≤200Pa
冷却水 Cooling air	≥0.15MPa
卷膜材质 Film roll material	PA/PE,PP/PE
卷膜厚度 Film Roll Thickness	Top film thickness 80-100um, bottom film thickness 160-240mm
包装方式 Packaging Method	Vacuum and Modified Atmosphere Packaging
包装速度 Packaging speed	3-6 cycles/min
电压 Voltage	380V 50Hz
功率 Power	10KW
机器重量 Machine weight	800kg
机器尺寸 Machine dimensions	L3500*W850*H1450mm
耗气量 Air consumption	≥0.6MPa
电气配置 Electrical Configuration	Busch / Mitsubishi / Omron, etc.
可选设备 Optional Device	Weight selection scale/ Coding machine

模具选择，根据客户需求定制 MOLD SELECTION

The mold specifications are customized according t the customer's product.



适用包装范围 APPLICATION

主要适用于真空、充气和包装各种食品、肉制品、海鲜、腌制食品等。

Mainly suitable for vacuum, gas flushing, and packaging of various foods, meat products, seafood, pickled foods, etc.

产品性能特点 PERFORMANCE FEATURES

1. 食品级SUS#304接触件
   Food grade SUS#304 contact parts
2. 使用卷膜热成型包装，降低包装成本
   Utilize roll film thermoforming packaging to reduce packaging costs.
3. 采用组合模具，更换无需额外工具
   Uses modular molds that can be changed without additional tools.
4. 精致设计，空间效率高，便于移动，非常适合优化车间布局
   Elegant design, high space efficiency, and easy mobility make it ideal for optimizing workshop layout.
5. 根据用户产品需求，可在真空基础上填充氮气或混合气体
   Based on user product requirements, nitrogen or mixed gases can be filled on top of the vacuum.
6. 配备德国普旭真空泵，具有高真空度、质量稳定、耐用可靠
   Equipped with a Busch vacuum pump from Germany, it features high vacuum levels, stable quality, and durable reliability.
7. 智能报警系统，快速找到问题点
   Smart alarm system for quickly identifying problem areas.
8. 配备废料收集系统，保持环境卫生
   Adopting cross-cutting and slitting systems, enabling computerized adjustments.

型号Model：CB-350V

气调真空盒装机
Modified Atmosphere Packaging Machine

高效率 High efficiency

更稳定 More stable

易操作 Easy to operate

视频网站： https://youtu.be/F_813iNiG_M
Video URL translation

扫码观看：
Scan to watch

CHUANGLIBAO

创利宝全球最具影响力的包装机供应商
Chuanglibao: The World's Most Influential Packaging Machine Supplier.

技术参数 TECHNICAL SPECIFICATIONS

型号Model	CB-350V
输出 Output	每分钟最多可生产14件产品(产品特性和长度可能会影响机器的输出) Up to 14 products per minute Product characteristic and length may affect machine output
包装盒尺寸 Packaging box dimensions	250+170+20 / 260+190+25 (L*W*H) (mm)
盒子类型 Box structure	Pp food grade, low temperature-40 °, high temperature 200
加热温度 Heating temperature	0 ~ 220 ° C
卷膜宽度 Film roll width	760mm
控制方法 Control method	PLC + touch screen
机器材料 Material of construction	304 + hard aluminum stainless steel
电源电压 Power supply voltage	AC380/50
真空泵电机 Power supply voltage	380V/50Hz
真空泵逃逸效率 Vacuum pump escape efficiency	100m/h
机器尺寸 Machine dimensions	L(1360)*W(840)*H(1475)mm
净重 Net weight	600kg
膜材料 Film material	PET/CPP, PET/PE, OPP/CPP, EVOH, etc.
注意 Note	The hard aluminum mold can be customized according to the size of the client packing box to meet the applicable requirements

包装材料 PACKAGING

托盘材料：聚丙烯（PP）、聚乙烯（PE）、聚对苯二甲酸乙二醇酯（PET）
卷膜材料：聚酯 / 流延聚丙烯（PET/CPP）聚酯 / 聚乙烯（PET/PE）双向拉伸聚丙烯 / 流延聚丙烯（OPP/CPP）乙烯 – 乙烯醇共聚物（EVOH）铝箔及其他适用复合膜

* Tray material: PP, PE, PET
* Film material: PET/CPP, PET/PE, OPP/CPP, EVOH, aluminum foil and another applicable composite film.

适用包装范围 APPLICATION

主要适用于新鲜、冷冻食品，如:冷肉、牛肉和羊肉、海鲜和水产品或熟食腌料、即食快餐、腌制产品、切片香肠和新鲜水果和其他食品。

fresh, frozen food products, such as: cold meat, beef andmutton.seafood and aquatic products (various fsh, frogs,shrimp, oystersor deli marinade, ready-to-eat fast food,cured products, slicedsausage and bacon, fresh fruits andother food products,to extend the shelf life of the food.

产品性能特点 PERFORMANCE FEATURES

1. 食品级SUS#304接触件
   Food grade SUS#304 contact parts
2. 用户界面通过触摸屏与控制器（PLC）连接，可调节参数
   Connected to the controller (PLC) via a touchscreen, it allows parameter adjustment
3. 机械设有故障显示系统，可帮助及时排除故障
   Equipped with a fault display system, it enables troubleshooting and fault elimination
4. 配备安全防护，符合企业安全管理要求
   Equipped with safety protection, it meets the safety requirements
5. 拉膜系统控制，可通过触摸屏自动调整
   The film pulling system control can be automatically adjusted via the touchscreen
6. 拥有技术专利，符合食品 QS 和医药 GMP 卫生标准
   Possessing technical patents, it complies with QS and GMP standards
7. 操作简便，易于清洁
   Easy to operate and clean
8. 可根据客户需要支持定制特殊尺寸托盘的自动气调包装机
   Automatic modified atmosphere packaging machine supporting customization for special-size trays

型号Model：CB-PT100

真空套袋机
Vacuum Bagging Machine

高效率 High efficiency

更稳定 More stable

易操作 Easy to operate

视频网站：https://youtu.be/GqCR0DCqa2s
Video URL translation

扫码观看：
Scan to watch

技术参数 TECHNICAL SPECIFICATIONS

型号Model	CB-PT100
输出 Output	每分钟最多可生产120件产品 (产品特性和长度可能会影响机器的输出) Up to 120 products per minute Product characteristic and length may affect machine output
包装尺寸长度 Packaging length	100-320mm
包装尺寸宽度 Packaging width	120-240mm
包装类型 Packaging type	Stand-up Pouch, Bags, Film, Pouch
计量方法 Measuring method	Measuring cups, ring feeders, electronic scales, etc.
卷膜材质 Film roll material	OPP/CPP,OPP/PE,PET/PE,PE
袋型 Bag type	Aluminum foil bags, paper bags,nylon bags
包装速度 Packaging speed	80-120bags/min
电压 Voltage	380V 50Hz
功率 Power	3KW
机器重量 Machine weight	1200kg
机器尺寸 Machine dimensions	L(2500)*W(1500)*H(1600)mm
耗气量 Air consumption	6kg/cm²
电机配置 Motor configuration	Dual servo
可选设备 Optional Device	Weight selection scale/ Coding machine

包装材料 PACKAGING

聚丙烯/聚乙烯，铝箔/聚乙烯，涤纶/镀铝/聚乙烯，尼龙/增强型聚乙烯，纸/聚乙烯等。

Polypropylene/Polyethylene, Aluminum Foil/Polyethylene, Polyester/Aluminum Coating/Polyethylene, Nylon/Reinforced Polyethylene, Paper/Polyethylene, etc.

适用包装范围 APPLICATION

主要适用于农产品、食品、药品、日用品及其他预制袋产品，如牛肉、蔬果、香肠、三文鱼、虾、鸡肉等袋装包装。

Mainly suitable for pre-made bag products such as agricultural products, food, medicine, daily necessities, and other packaged items like beef, fruits and vegetables, sausages, salmon, shrimp, chicken, and more.

产品性能特点 PERFORMANCE FEATURES

1. 食品级SUS#316接触件
   Food grade SUS#316 contact parts
2. 使用气缸控制密封刀运行
   Sealing knife operation is controlled by a pneumatic cylinder
3. 机械设有故障显示系统，可帮助及时排除故障
   Equipped with a fault display system, it enables troubleshooting and fault elimination
4. 配备安全防护，符合企业安全管理要求
   Equipped with safety protection, it meets the safety requirements
5. 拉膜系统及色标控制系统，可通过触摸屏自动调整
   The film pulling and color mark control system can be adjusted via a touch screen
6. 拥有技术专利，符合食品 QS 和医药 GMP 卫生标准
   Possessing technical patents, it complies with QS and GMP standards
7. 全自动计量灌装和封口，空袋自动警报
   Fully automatic metering filling and sealing, with an automatic alarm for empty bags
8. 可根据客户需要制成自立袋、薄膜、特殊袋
   Can be made into stand-up pouches, films, and special bags as needed
9. 整机采用封闭式结构，有效防止粉坐进入机器
   According to customer needs, we can produce three-sided bags, four-sided bags, pillow bags, standing bags, and special bags

型号Model：CB-450PM

水平颗粒给袋机
Horizontal Granule Doypack Packing Machine

高效率 High efficiency

更稳定 More stable

易操作 Easy to operate

技术参数 TECHNICAL SPECIFICATIONS

型号Model

输出Output	每分钟最多可生产120件产品（产品特性和长度可能会影响机器的输出） Up to120 products per minute Product characteristic and length may affect machine output				
型号 Model	CB-160	CB -210	CB-260	CB-85	CB-450
包装宽度 Packaging width	55-160mm	100-210mm	140-260mm	55-110mm	55-85mm
包装长度 Packaging length	80-260mm	100-360mm	140-380mm	100-220mm	100-230mm
包装速度 Running Speed	5-55bags/min	5-45bags/min	5-45bags/min	50-80bags/min	60-120bags/min
包装容量Packaging Capacity	5-500ml	50-1000ml	200-2000ml	200-2000ml	380V 50/60Hz
电压 Voltage	380V 50/60Hz	380V 50/60Hz	380V 50/60Hz	380V 50/60Hz	550-3500ml
功率 Power	0.35m³/min	0.45m³/min	0.55m³/min	0.55m³/min	0.65m³/min
耗气量 Air consumption	2.5kw 50Hz	3.5kw 50Hz	3.5kw 50Hz	3.5kw 50Hz	6kw 50Hz
机器尺寸 Machine size(mm)	1700*1050*1100	2150-1200*1200	2450*1350*1300	2450*1350*1300	3300*1450*1450
机器重量 Machine weight	600Kg	650Kg	750Kg	800Kg	1000Kg
适用袋型 Suitable Bag Types	Three-side seal, four-side seal, back seal, self-standing bag, M-shaped bag, special-shaped bag	Three/four side seal, zipper bag, back seal, Self-standing bag, M-shaped bag, special-shaped bag	Three/four side seal, zipper bag, back seal, Self-standing bag, M-shaped bag, special-shaped bag	Special-shaped bags, flat bags, stand-up bags, three/four side seal bags, handbags, paper bags and other prefabricated bags	Special-shaped bags, flat bags, stand-up bags, three/four side seal bags, handbags, paper bags and other prefabricated bags

包装材料 PACKAGING

聚丙烯/聚乙烯，铝箔/聚乙烯，涤纶/镀铝/聚乙烯，尼龙/增强型聚乙烯，纸/聚乙烯等。

Polypropylene/Polyethylene, Aluminum Foil/Polyethylene, Polyester/Aluminum Coating/Polyethylene, Nylon/Reinforced Polyethylene, Paper/Polyethylene, etc.

适用包装范围 APPLICATION

主要适用于块状和颗粒状物料的计量包装，如糖果、膨化食品、小饼干、炒货干果、砂糖、速冻食品及五金塑料产品等。

Mainly suitable for the measurement and packaging of block-shaped and granular materials, such as candies, puffed snacks, small cookies, roasted nuts, granulated sugar, frozen food, hardware components, plastic products, and similar items.

产品性能特点 PERFORMANCE FEATURES

1. 食品级SUS#304接触件
   Food grade SUS#304 contact parts
2. 独立的温控系统，封口美观
   An independent temperature control system ensures beautiful sealing
3. 机械设有故障显示系统，可帮助及时排除故障
   Equipped with a fault display system, it enables troubleshooting and fault elimination
4. 配备安全防护，符合企业安全管理要求
   Equipped with safety protection, it meets the safety requirements
5. 拉膜系统及色标控制系统，可通过触摸屏自动调整
   The film pulling and color mark control system can be adjusted via a touch screen
6. 拥有技术专利，符合食品 QS 和医药 GMP 卫生标准
   Possessing technical patents, it complies with QS and GMP standards
7. 全自动称重袋装和封口，空袋自动警报
   Fully automatic weighing, bagging, and sealing with an automatic alarm for empty bags
8. 可制成3边袋、4边袋、枕式袋、自立袋、M袋、特殊袋
   Can be made into 3-side seal bags, 4-side seal bags, pillow bags, stand-up bags, M-type bags, and special-shaped bags
9. 整机采用封闭式结构，有效防止粉坐进入机器
   According to customer needs, we can produce three-sided bags, four-sided bags, pillow bags, standing bags, and special bags

型号Model: CB-450PP

水平液体给袋机
Horizontal Liquid Doypack Packing Machine

高效率 High efficiency

更稳定 More stable

易操作 Easy to operate

技术参数 TECHNICAL SPECIFICATIONS

型号Model

输出 Output	每分钟最多可生产120件产品(产品特性和长度可能会影响机器的输出) Up to120 products per minute Product characteristic and length may affect machine output				
型号 Model	CB-160	CB-210	CB-260	CB-85	CB-450
包装宽度 Packaging width	55-160mm	100-210mm	140-260mm	55-110mm	55-85mm
包装长度 Packaging length	80-260mm	100-360mm	140-380mm	100-220mm	100-230mm
包装速度 Running Speed	5-55bags/min	5-45bags/min	5-45bags/min	50-80bags/min	60-120bags/min
包装容量 Packaging Capacity	5-500ml	50-1000ml	200-2000ml	200-2000ml	380V 50/60Hz
电压 Voltage	380V 50/60Hz	380V 50/60Hz	380V 50/60Hz	380V 50/60Hz	550-3500ml
功率 Power	0.35m³/min	0.45m³/min	0.55m³/min	0.55m³/min	0.65m³/min
耗气量 Air consumption	2.5kw 50Hz	3.5kw 50Hz	3.5kw 50Hz	3.5kw 50Hz	6kw 50Hz
机器尺寸 Machine size(mm)	1700*1050*1100	2150-1200*1200	2450*1350*1300	2450*1350*1300	3300*1450*1450
机器重量 Machine weight	600Kg	650Kg	750Kg	800Kg	1000Kg
适用袋型 Suitable Bag Types	Three-side seal, four-side seal, back seal, self-standing bag, M-shaped bag, special-shaped bag	Three/four side seal, zipper bag, back seal, Self-standing bag, M-shaped bag, special-shaped bag	Three/four side seal, zipper bag, back seal, Self-standing bag, M-shaped bag, special-shaped bag	Special-shaped bags, flat bags, stand-up bags, three/four side seal bags, handbags, paper bags and other prefabricated bags	Special-shaped bags, flat bags, stand-up bags, three/four side seal bags, handbags, paper bags and other prefabricated bags

包装材料 PACKAGING

聚丙烯/聚乙烯，铝箔/聚乙烯，涤纶/镀铝/聚乙烯，尼龙/增强型聚乙烯，纸/聚乙烯等。

Polypropylene/Polyethylene, Aluminum Foil/Polyethylene, Polyester/Aluminum Coating/Polyethylene, Nylon/Reinforced Polyethylene, Paper/Polyethylene, etc.

适用包装范围 APPLICATION

主要适用于液体类包装: 番茄酱、酱汁、果汁、蜂蜜、洗发水、面霜、果冻等。

Mainly suitable for liquid packaging: ketchup, sauces, fruit juice, honey, shampoo, cream, jelly, etc.

产品性能特点 PERFORMANCE FEATURES

1. 食品级SUS#304接触件
   Food grade SUS#304 contact parts
2. 独立的温控系统，封口美观
   An independent temperature control system ensures beautiful sealing
3. 机械设有故障显示系统，可帮助及时排除故障
   Equipped with a fault display system, it enables troubleshooting and fault elimination
4. 配备安全防护，符合企业安全管理要求
   Equipped with safety protection, it meets the safety requirements
5. 拉膜系统及色标控制系统，可通过触摸屏自动调整
   The film pulling and color mark control system can be adjusted via a touch screen
6. 拥有技术专利，符合食品 QS 和医药 GMP 卫生标准
   Possessing technical patents, it complies with QS and GMP standards
7. 全自动检查系统可以检查袋子的情况，填充和密封的情况
   The system automatically checks the condition of the bags, as well as the filling and sealing status.
8. 可制成异型袋、自立袋、四面封口袋、手提袋、纸袋等预制袋
   Can be made into Pre-made bags such as irregular-shaped bags, stand-up bags, four-side seal bags, handle bags, and paper bags.
9. 整机采用封闭式结构，有效防止粉坐进入机器
   According to customer needs, we can produce three-sided bags, four-sided bags, pillow bags, standing bags, and special bags

型号Model：CB-450PA

水平粉末给袋机
Horizontal Powder Doypack Packing Machine

高效率 High efficiency

更稳定 More stable

易操作 Easy to operate

技术参数 TECHNICAL SPECIFICATIONS

型号Model

输出 Output	每分钟最多可生产120件产品(产品特性和长度可能会影响机器的输出) Up to120 products per minute Product characteristic and length may affect machine output				
型号 Model	CB-160	CB-210	CB-260	CB-85	CB-450
包装宽度 Packaging width	55-160mm	100-210mm	140-260mm	55-110mm	55-85mm
包装长度 Packaging length	80-260mm	100-360mm	140-380mm	100-220mm	100-230mm
包装速度 Running Speed	5-55bags/min	5-45bags/min	5-45bags/min	50-80bags/min	60-120bags/min
包装容量 Packaging Capacity	5-500ml	50-1000ml	200-2000ml	200-2000ml	380V 50/60Hz
电压 Voltage	380V 50/60Hz	380V 50/60Hz	380V 50/60Hz	380V 50/60Hz	550-3500ml
功率 Power	0.35m³/min	0.45m³/min	0.55m³/min	0.55m³/min	0.65m³/min
耗气量 Air consumption	2.5kw 50Hz	3.5kw 50Hz	3.5kw 50Hz	3.5kw 50Hz	6kw 50Hz
机器尺寸 Machine size(mm)	1700*1050*1100	2150-1200*1200	2450*1350*1300	2450*1350*1300	3300*1450*1450
机器重量 Machine weight	600Kg	650Kg	750Kg	800Kg	1000Kg
适用袋型 Suitable Bag Types	Three-side seal, four-side seal, back seal, self-standing bag, M-shaped bag, special-shaped bag	Three/four side seal, zipper bag, back seal, Self-standing bag, M-shaped bag, special-shaped bag	Three/four side seal, zipper bag, back seal, Self-standing bag, M-shaped bag, special-shaped bag	Special-shaped bags, flat bags, stand-up bags, three/four side seal bags, handbags, paper bags and other prefabricated bags	Special-shaped bags, flat bags, stand-up bags, three/four side seal bags, handbags, paper bags and other prefabricated bags

包装材料 PACKAGING

聚丙烯/聚乙烯，铝箔/聚乙烯，涤纶/镀铝/聚乙烯，尼龙/增强型聚乙烯，纸/聚乙烯等。

Polypropylene/Polyethylene, Aluminum Foil/Polyethylene, Polyester/Aluminum Coating/Polyethylene, Nylon/Reinforced Polyethylene, Paper/Polyethylene, etc.

适用包装范围 APPLICATION

主要适用于面粉，奶粉、果汁粉、饮料粉、调味料粉、建筑粉末等粉剂产品的自动计量包装。

Mainly applicable to the automatic measurement and packaging of powder products such as flour, milk powder, juice powder, beverage powder, seasoning powder, construction powder, etc.

产品性能特点 PERFORMANCE FEATURES

1. 食品级SUS#304接触件
   Food grade SUS#304 contact parts
2. 独立的温控系统，封口美观
   An independent temperature control system ensures a visually appealing seal
3. 机械设有故障显示系统，可帮助及时排除故障
   Equipped with a fault display system, it enables troubleshooting and fault elimination
4. 配备安全防护，符合企业安全管理要求
   Equipped with safety protection, it meets the safety requirements
5. 拉膜系统及色标控制系统，可通过触摸屏自动调整
   The film pulling and color mark control system can be adjusted via a touch screen
6. 拥有技术专利，符合食品 QS 和医药 GMP 卫生标准
   Possessing technical patents, it complies with QS and GMP standards
7. 操作简便，易于清洁
   Easy to operate and clean
8. 可根据客户需要制成枕式袋、插脚袋、打挂孔袋、连包袋
   Ilt can produce pillow bags, side-gusseted bags, punch-hole bags, etc.
9. 整机采用封闭式结构，有效防止粉坐进入机器
   The entire machine adopts a closed structure to effectively prevent powder from entering

型号Model：CB-200

颗粒多头秤给袋机
Doypack machine with multihead weigher

高效率 High efficiency

更稳定 More stable

易操作 Easy to operate

视频网站：https://youtu.be/yVJJ2l4L9yE
Video URL translation

扫码观看：
Scan to watch

技术参数 TECHNICAL SPECIFICATIONS

型号Model	CB-200
输出 Output	每分钟最多可生产65件产品（产品特性和长度可能会影响机器的输出） Up to 65 products per minute Product characteristic and length may affect machine output
包装尺寸长度 Packaging length	55-200mm
包装尺寸宽度 Packaging width	65-400mm
包装范围 Packaging range	20g-500g
卷膜最大宽 Maximum roll width	400mm
卷膜材质 Film roll material	PET/MPET/PE 80 micron
袋型 Bag type	Pillow bag
包装速度 Packaging speed	65 bags/min
电压 Voltage	380V 50Hz
功率 Power	3.5KW
机器重量 Machine weight	2600kg
机器尺寸 Machine dimensions	L5000*W2000*H3700mm
耗气量 Air consumption	0.45MPa/0.3m^3
电机配置 Motor configuration	Dual servo
可选设备 Optional Device	Weight selection scale/ Coding machine

包装材料 PACKAGING

聚丙烯/聚乙烯，铝箔/聚乙烯，尼龙/增强型聚乙烯，纸/聚乙烯等。
Polypropylene/Polyethylene, Aluminum Foil/Polyethylene, Nylon/Reinforced Polyethylene, Paper/Polyethylene, etc.

适用包装范围 APPLICATION

主要适用于规则颗粒状的计量包装，如咖啡豆、白砂糖、大豆、大米、玉米粒、海盐、食用盐及塑料粒产品等。
Mainly suitable for the measurement and packaging of regularly granular products, such as coffee beans, white sugar, soybeans, rice, corn kernels, sea salt, table salt, and plastic pellet products, etc.

产品性能特点 PERFORMANCE FEATURES

1. 食品级SUS#304接触件
   Food grade SUS#304 contact parts
2. 独立的温控系统，封口美观
   An independent temperature control system ensures a visually appealing seal
3. 机械设有故障显示系统，可帮助及时排除故障
   Equipped with a fault display system, it enables troubleshooting and fault elimination
4. 配备安全防护，符合企业安全管理要求
   Equipped with safety protection, it meets the safety requirements
5. 拉膜系统及色标控制系统，可通过触摸屏自动调整
   The film pulling and color mark control system can be adjusted via a touch screen
6. 拥有技术专利，符合食品 QS 和医药 GMP 卫生标准
   Possessing technical patents, it complies with QS and GMP standards
7. 操作简便，易于清洁
   Easy to operate and clean
8. 可根据客户需要制成枕式袋、插脚袋、打挂孔袋、连包袋
   IIt can produce pillow bags, side-gusseted bags, punch-hole bags, etc.
9. 整机采用封闭式结构，有效防止粉坐进入机器
   The entire machine adopts a closed structure to effectively prevent powder from entering

型号Model：CB-300SK

袜子套袋机
Socks zipper bag packaging machine

高效率 High efficiency

更稳定 More stable

易操作 Easy to operate

视频网站：https://youtu.be/K43XLETKmp4
Video URL translation

扫码观看：
Scan to watch

技术参数 TECHNICAL SPECIFICATIONS

型号Model	CB-300SK
输出 Output	每分钟最多可生产40件产品（产品特性和长度可能会影响机器的输出） Up to 40 products per minute Product characteristic and length may affect machine output
包装尺寸长度 Packaging length	150-300mm
包装尺寸宽度 Packaging width	70-150mm
包装尺寸高度 Packaging width	40-90mm
机器类型 Machine type	Auto Packing Machine
卷膜材质 Film roll material	PP/CPP, PT/PE, KOP/CPP , Aluminum film
袋型 Bag type	Stand-up Pouch, Bags, Film, Pouch, case
包装速度 Packaging speed	10-40bags/min
电压 Voltage	220V 50Hz
功率 Power	5.5KW
机器重量 Machine weight	500kg
机器尺寸 Machine dimensions	L2200*W970*H1330mm
耗气量 Air consumption	6kg/cm²
电机配置 Motor configuration	Dual servo
可选设备 Optional Device	Weight selection scale/ Coding machine

包装材料 PACKAGING

聚丙烯/聚乙烯，铝箔/聚乙烯，尼龙/增强型聚乙烯，纸/聚乙烯等。
Polypropylene/Polyethylene, Aluminum Foil/Polyethylene, Nylon/Reinforced Polyethylene, Paper/Polyethylene, etc.

适用包装范围 APPLICATION

主要适用于袜子、手套、面包、耳机、毛巾、玩具模型、食品等。
Mainly suitable for socks, gloves, bread, headphones, towels, toy models, food, etc.

产品性能特点 PERFORMANCE FEATURES

1. 食品级SUS#304接触件
Food grade SUS#304 contact parts
2. 独立的温控系统，封口美观
An independent temperature control system ensures a visually appealing seal
3. 机械设有故障显示系统，可帮助及时排除故障
Equipped with a fault display system, it enables troubleshooting and fault elimination
4. 配备安全防护，符合企业安全管理要求
Equipped with safety protection, it meets the safety requirements
5. 拉膜系统及色标控制系统，可通过触摸屏自动调整
The film pulling and color mark control system can be adjusted via a touch screen
6. 采用预制袋，全自动取袋、送袋、开袋、推料、推袋、封口
Using pre-made bags, with fully automatic bag picking, bag feeding, bag opening, material pushing, bag pushing, and sealing
7. 操作简便，易于清洁
Easy to operate and clean
8. 采用自动分拣输送或人工送料，方便与自动生产线连接，节省人工成本
Equipped with automatic sorting and conveying or manual feeding, it is convenient to connect with automated production lines, saving labor costs
9. 主机由多轴伺服独立驱动，响应快，动作精确，密封切割位置准确
The main unit is independently driven by multi-axis servo motors, offering fast response, precise movements, and accurate sealing and cutting positions

型号Model：CB-LSM221L

夹心饼干包装机
Sandwich biscuit packaging machine

高效率 High efficiency

更稳定 More stable

易操作 Easy to operate

视频网站：https://youtu.be/zh_LX_YbvR0
Video URL translation

扫码观看：
Scan to watch

技术参数 TECHNICAL SPECIFICATIONS

型号Model	CB-LSM221L
输出 Output	每分钟最多可生产100件产品（产品特性和长度可能会影响机器的输出） Up to 100 products per minute Product characteristic and length may affect machine output
包装尺寸长度 Packaging length	35-65mm
包装尺寸宽度 Packaging width	35-65mm
包装尺寸高度 Packaging round	35-65mm
机器类型 Machine type	Auto Packing Machine
卷膜材质 Film roll material	Plastic, Paper
袋型 Bag type	Stand-up Pouch, Bags, Film, Pouch
包装速度 Packaging speed	40-100bags/min
电压 Voltage	220V 50Hz
功率 Power	4.5KW
机器重量 Machine weight	1200kg
机器尺寸 Machine dimensions	L3630*W700*H800mm
奶油罐 Cream tank	35L-70L
电机配置 Motor configuration	Dual servo
可选设备 Optional Device	Weight selection scale/ Coding machine

包装材料 PACKAGING

聚丙烯/聚乙烯，铝箔/聚乙烯，尼龙/增强型聚乙烯，纸/聚乙烯等。
Polypropylene/Polyethylene, Aluminum Foil/Polyethylene, Nylon/Reinforced Polyethylene, Paper/Polyethylene, etc.

适用包装范围 APPLICATION

主要适用于双排单色奶油或果酱夹心饼干食品等。
Mainly applicable to double-row single-color cream or jam sandwich cookies and other similar food products.

产品性能特点 PERFORMANCE FEATURES

1. 从奶油填充到包装的操作所需工人较少，饼干生产成本更低
Less workers required for operation from cream filling to packaging, cost lower of biscuits productions
2. 奶油夹心饼干的数量可以自由调整，范围为4–20片
Cream sandwiches quantities can be vary from from 4-20PCS freely
3. PLC控制，操作简单，包括机器设置、料斗控制和速度调整
PLC for simple operation including machine set-up, hopper controls, speed adjustments
4. 奶油形状：可处理多种形状，包括圆形、方形、矩形
Cream shapes: including a variety of shapes such as round, square, and rectangular
5. 不锈钢齿轮泵，奶油料斗与模板之间的连接管采用夹套设计
Stainless steel gear pump, with jacket design for connection tubes between cream hopper and stencil.
6. 配备可拆卸的废料盘，便于废料收集和机器清洁
Removable scrap trays are provided for simple scrap collection and machine cleaning
7. 操作简便，机器速度和奶油量的简单调整
Easy to operate: Simple adjustments for machine speeds, cream volumed
8. 不锈钢齿轮泵，奶油料斗与模板之间的连接管采用夹套设计
Stainless steel gear pump.connection tubes between cream hopper and stencil are jacket design
9. 主机由多轴伺服独立驱动，响应快，动作精确，密封切割位置准确
The main unit is independently driven by multi-axis servo motors, offering fast response, precise movements, and accurate sealing and cutting positions

型号Model：CB-ZF2

转盘理料线
Turntable packaging line

高效率 High efficiency

更稳定 More stable

易操作 Easy to operate

视频网站： https://youtu.be/m-EyR4vFHyk
Video URL translation

扫码观看：
Scan to watch

技术参数 TECHNICAL SPECIFICATIONS

型号Model	CB-ZF2
输出 Output	每分钟最多可生产200件产品（产品特性和长度可能会影响机器的输出） Up to 200 products per minute Product characteristic and length may affect machine output
包装尺寸长度 Product size	According to the actual situation
袋型 Bag type	Pillow Seal
包装速度 Packaging speed	80-200bags/min
电压 Voltage	220V/380V 50Hz
功率 Power	4.5KW
机器重量 Machine weight	550kg
机器尺寸 Machine dimensions	L1500*W1500*H890mm
输送带宽度 Conveyor belt width	600/800/1000/1200mm
电机配置 Motor configuration	Dual servo
应用领域 Application Fields	biscuit, chocolate,cake, eggroll,Waffle,wafer

包装材料 PACKAGING

聚丙烯/聚乙烯，铝箔/聚乙烯，尼龙/增强型聚乙烯，纸/聚乙烯等。

Polypropylene/Polyethylene, Aluminum Foil/Polyethylene, Nylon/Reinforced Polyethylene, Paper/Polyethylene, etc.

适用包装范围 APPLICATION

主要适用于双排单色奶油或果酱夹心饼干食品等。

Mainly applicable to double-row single-color cream or jam sandwich cookies and other similar food products.

产品性能特点 PERFORMANCE FEATURES

1. 物料通过转盘的离心力分离，物料逐一排出，并通过尾架送至包装机进行包装。
The materials are separated by the centrifugal force of the turntable, and the materials are discharged one by one, and the materials are sent to the packaging machine for packaging through the tail rack.

2. 该生产线适用于包装饼干、曲奇等烘焙类产品，或记号笔、PVC管等形状规则的商品类产品。
For this line is suitable to packing the products like cookies ,biscuit,such bakery products , or the commodity products like the mark pen ,PVC pie such regulaly shape products.

3. 主控电路采用本公司自主研发的PLC，配有彩色触摸屏显示和变频控制，操作员与设备之间的界面完善，使操作和调整更加便捷。
Main control circuit adopts developed by our company PLC, color touch screen display, inverter control, perfect interface between operator and machine. That make operation and adjustment easily.

4. 包装速度和袋长由双变频器控制，无级变速，调节范围广，可与前道工序的生产线完美匹配。
The packing speed and the length of the bag are controlled by the double frequency converter. Step-less variable speed, wide adjustment range, can be a perfect match with the production line of the former process.

5. 高灵敏度电眼具备自动追踪袋长的功能，设置后无需手动调整。
High sensitive electric eye is the function of automatic tracking bags length accurately, no manual adjustment after setting.

型号Model：CB-ZF2

全自动包装线
Fully automatic packaging line

高效率 High efficiency

更稳定 More stable

易操作 Easy to operate

视频网站： https://youtu.be/1ELhdtnhQKg
Video URL translation

扫码观看：
Scan to watch

技术参数 TECHNICAL SPECIFICATIONS

型号Model	CB-ZF2
输出 Output	每分钟最多可生产200件产品（产品特性和长度可能会影响机器的输出） Up to 200 products per minute Product characteristic and length may affect machine output
包装膜宽度 Film width	≤300mm
袋型 Bag type	Pillow Seal
包装速度 Packaging speed	80-200bags/min
电压 Voltage	220V 50/60Hz
功率 Power	6.0KW
机器重量 Machine weight	1050kg
机器尺寸 Machine dimensions	L8000*W2200*H1500mm
输送带宽度 Conveyor belt width	600/700/800/1000mm
电机配置 Motor configuration	Dual servo
应用领域 Application Fields	biscuit, chocolate,cake, eggroll,Waffle,wafer

包装材料 PACKAGING

聚丙烯/聚乙烯，铝箔/聚乙烯，尼龙/增强型聚乙烯，纸/聚乙烯等。

Polypropylene/Polyethylene, Aluminum Foil/Polyethylene, Nylon/Reinforced Polyethylene, Paper/Polyethylene, etc.

适用包装范围 APPLICATION

主要适用于食品行业、化学工业、制药业、五金行业，适用于圆形、方形或条形的产品。

Mainly applicable to the food industry, chemical industry, pharmaceuticals, and hardware industry, suitable for products that are round, square, or bar-shaped.

产品性能特点 PERFORMANCE FEATURES

1. 分拣包装效率：80~200包/分钟（取决于产品和包装材料）
Sorting and packaging efficiency: 80~200 packs/minute (depending on the product and packaging material).

2. 支持快速调整大小托盘，满足不同产品的需要。
Quick adjustment of large and small trays to meet the needs of different products.

3. 系统能自动完成盒子的分离、开启、装填月饼或蛋糕、放入脱氧剂袋中、分类及包装，全程无需人工接触食品，减少二次污染，确保食品安全。
The system can automatically separate and open boxes, fill mooncakes or cakes, insert oxygen absorber bags, sort, and pack, all without human contact with food, reducing secondary contamination and ensuring food safety.

4. 通过触摸屏与嵌入式系统实时交互，实现智能控制。PLC分配产品菜单功能便于快速切换产品。
Real-time interaction through a touchscreen and embedded system enables intelligent control. The PLC menu function allows for quick product changes.

5. 设备采用悬臂框架设计，易于安装、拆卸、维护和清洁。
The equipment features a cantilever frame design for easy installation, disassembly, maintenance, and cleaning.

型号Model：CB-G120

挂耳式咖啡机
Drip Coffee Bag Packing Machine

高效率 High efficiency

更稳定 More stable

易操作 Easy to operate

视频网站： https://youtube.com/shorts/JeM47CKbFjg
Video URL translation

扫码观看：
Scan to watch

技术参数 TECHNICAL SPECIFICATIONS

型号Model	CB-G120
输出 Output	每分钟最多可生产280件产品（产品特性和长度可能会影响机器的输出） Up to 200 products per minute Product characteristic and length may affect machine output
填充范围 Filling range	5-10g
填充物料 Filling Material	Powder
内袋尺寸 Inner bag size	90*90mm(L*W)
外袋尺寸 Outer bag size	120mm*100mm(L*W)
包装速度 Packaging speed	60-80 bags/min
电压 Voltage	AC220V / 50Hz
功率 Power	3.7kw
机器重量 Machine weight	660kg
机器尺寸 Machine dimensions	1210 * 832 * 2141 mm
应用领域 Application Fields	Pour-over Coffee, Food, Commodity

包装材料 PACKAGING

聚丙烯/聚乙烯，铝箔/聚乙烯，尼龙/增强型聚乙烯，纸/聚乙烯等。

Polypropylene/Polyethylene, Aluminum Foil/Polyethylene, Nylon/Reinforced Polyethylene, Paper/Polyethylene, etc.

适用包装范围 APPLICATION

主要适用于包装挂耳咖啡的内袋和外袋。该机器支持快速更换物料，客户可以选择不同种类和烘焙程度的咖啡粉进行包装。

Mainly suitable for packaging the inner and outer bags of drip coffee. The machine supports quick material change, allowing customers to choose from different types and roast levels of coffee powder for packaging.

产品性能特点 PERFORMANCE FEATURES

1. 该机器适用于咖啡粉和小颗粒物料的包装。
The machine is suitable for ground coffee and small particulate material.

2. 采用三边密封的特殊滴滤袋，可直接挂在杯边，冲泡效果更佳。
The specially designed drip filter bag with three-side sealing can be directly hung on the edge of the cup, offering a better brewing effect.

3. 该机器集多种自动功能于一体，如制袋、计量、填充、封口切割、计数、批号打印等功能。
The machine integrates automatic function, such as bag making, measuring, filing, sealing cutting, counting.batch number printing and other functions.

4. 滴滤内袋采用无纺布材质，确保冲泡方便且卫生。
The drip filter inner bag is made of non-woven fabric, ensuring convenient and hygienic brewing.

5. 封口采用先进的超声波封口技术，封口完美，袋型美观。
The sealing adopts advanced ultrasonic sealing technology, ensuring a perfect seal and a beautiful bag shape.

6. 包装材料：滤纸、复合膜、尼龙、玉米纤维（食品级）、滴滤袋。
Packing material:filter paper, composite membrane, nylon, corn (Food grade),drip fitter bag.

型号Model：CB-SJB02-04

三角袋茶叶包装机
Triangle bag tea packaging machine

高效率 High efficiency

更稳定 More stable

易操作 Easy to operate

视频网站： https://youtu.be/JAQZp4GG6MQ
Video URL translation

扫码观看：
Scan to watch

技术参数 TECHNICAL SPECIFICATIONS

型号Model	CB-SJB02-04
输出 Output	每分钟最多可生产280件产品（产品特性和长度可能会影响机器的输出） Up to 200 products per minute Product characteristic and length may affect machine output
填充范围 Filling range	5-10g
填充物料 Filling Material	Powder
内袋尺寸 Inner bag size	90*90mm(L*W)
外袋尺寸 Outer bag size	120mm*100mm(L*W)
包装速度 Packaging speed	60-80 bags/min
电压 Voltage	AC220V / 50Hz
功率 Power	3.7kw
机器重量 Machine weight	660kg
机器尺寸 Machine dimensions	1210 * 832 * 2141 mm
应用领域 Application Fields	Pour-over Coffee, Food, Commodity

包装材料 PACKAGING

聚丙烯/聚乙烯，铝箔/聚乙烯，尼龙/增强型聚乙烯，纸/聚乙烯等。

Polypropylene/Polyethylene, Aluminum Foil/Polyethylene, Nylon/Reinforced Polyethylene, Paper/Polyethylene, etc.

产品性能特点 PERFORMANCE FEATURES

1. 该机器适用于咖啡粉和小颗粒物料的包装。
The machine is suitable for ground coffee and small particulate material.

2. 采用三边密封的特殊滴滤袋，可直接挂在杯边，冲泡效果更佳。
The specially designed drip filter bag with three-side sealing can be directly hung on the edge of the cup, offering a better brewing effect.

3. 该机器集多种自动功能于一体，如制袋、计量、填充、封口切割、计数、批号打印等功能。
The machine integrates automatic function, such as bag making, measuring, filing, sealing cutting, counting.batch number printing and other functions.

4. 滴滤内袋采用无纺布材质，确保冲泡方便且卫生。
The drip filter inner bag is made of non-woven fabric, ensuring convenient and hygienic brewing.

5. 封口采用先进的超声波封口技术，封口完美，袋型美观。
The sealing adopts advanced ultrasonic sealing technology, ensuring a perfect seal and a beautiful bag shape.

6. 包装材料：滤纸、复合膜、尼龙、玉米纤维（食品级）、滴滤袋。
Packing material:filter paper, composite membrane, nylon, corn (Food grade),drip fitter bag.

适用包装范围 APPLICATION

主要适用于包装挂耳咖啡的内袋和外袋。该机器支持快速更换物料，客户可以选择不同种类和烘焙程度的咖啡粉进行包装。

Mainly suitable for packaging the inner and outer bags of drip coffee. The machine supports quick material change, allowing customers to choose from different types and roast levels of coffee powder for packaging.

型号Model：CB-3SPF

全自动吸嘴袋灌封机
Automatic Spout Pouch Filling Capping Machine

高效率 High efficiency

更稳定 More stable

易操作 Easy to operate

视频网站： https://youtu.be/dLg6Vu3lAOY
Video URL translation

扫码观看：
Scan to watch

技术参数 TECHNICAL SPECIFICATIONS

型号Model	CB-3SPF
输出 Output	每分钟最多可生产200件产品（产品特性和长度可能会影响机器的输出） Up to 200 products per minute Product characteristic and length may affect machine output
生产速度 Production speed	30m1-100ml:100 bags/min, within 500ml: 60-70bags/min
填充量 Filling volume	100-1000ml
充填准确性 Filling accuracy	±1%
填充粘度 Filing viscosity	12000CPS
填料泵头 Filling pump head	Gear pump/piston pump*6 (select according to thematerial)
速度(BPM) Speed(BPM)	15-80 Bag/min (depending on filling volume)
电压 Voltage	220V,50HZ
功率使用 Power usage	5KW
机器重量 Machine weight	1000kg
机器尺寸 Machine dimensions	L2500mm*W2200mm*H1900mm
框架材料 Frame material	304 Stainless Steel

包装材料 PACKAGING

聚丙烯/聚乙烯，铝箔/聚乙烯，尼龙/增强型聚乙烯，纸/聚乙烯等。

Polypropylene/Polyethylene, Aluminum Foil/Polyethylene, Nylon/Reinforced Polyethylene, Paper/Polyethylene, etc.

适用包装范围 APPLICATION

主要适用于液体或半流体产品，如饮料、果汁、番茄酱、洗涤剂、白脱牛奶、蛋黄酱等袋装包装。

Mainly suitable for liquid or semi-liquid products, such as beverages, fruit juices, ketchup, detergents, buttermilk, mayonnaise, and other bagged packaging.

产品性能特点 PERFORMANCE FEATURES

1. 包装过程全自动，无需人工操作
The packaging process is fully automatic and requires no manual operation.

2. 物料接触部分均采用SUS316L不锈钢制成，符合GMP标准
The contact parts of the materials are all made of SUS316L stainless steel, in line with GMP standards.

3. 可根据填充物料的特性选择不同的填充装置
Different filling devices can be selected according to the character of the filling materials.

4. 智能检测袋装填充和密封
Intelligent detection for bag filling and sealing.

5. 采用德国西门子PLC系统和法国施耐德电气系统，性能稳定且耐用
Germany Siemens PLC system, France Schneider Electric System. Stable performance and durability.

6. 欧姆龙智能温控系统，自动密封温度补偿，温控精度高，封口美观大方
OMRON intelligent temperature control system, with automatic sealingtemperature compensation, high temperature control accuracy, and beautiful and elegant sealing.

7. 填充部分可直接清洗，但应避免电源部分接触水
The filling part can be washed directly, and the power supply part should be avoided.

配套设备（立式机）
SUPPORTING EQUIPMENT(VERTICAL MACHINE)

Multi-Head Weigher
电脑组合秤

适用包装范围 APPLICATION

适用于膨化食品、果蔬、糖果、小饼干、干果、瓜子、炒货、水饺、汤圆、五金塑料等颗粒状物进行自动化称量。

It is suitable for weighing of granule, slice, roll or irregular shape materials such as candy,seed,jelly,fries, coffeegranule peanut, puffy food, biscuit, chocolate,nut, yogurtpet foo frozen foods, etc.It is also suitable for weighingsmall hardwar and plastic component.

Auger Filler
螺杆计量机

适用包装范围 APPLICATION

适用于计量、奶粉、面粉、咖啡粉、蛋白粉、腻子粉等粉状物进行自动化计量。

Apply for automatic measurement of powder, such as milkpowder, flour, coffee powder, protein powder, putty powder, etc.

Volumetric Cup Filler
量杯计量系统

适用包装范围 APPLICATION

适用于小颗粒物料以及流动性好的粉状物，如砂糖、调味料、种子等物料。

Applyfor small particle materials and fluidity powder, such asgranulated sugar,seasoning,seeds and other materials.

Z.Shaped Bucket Elevator
Z型斗式提升机

适用包装范围 APPLICATION

适用垂直提升，90度输送节省占地面积，降低动力损耗; 采用斗式承载物料,无散落，与包装机、多头称配套可实现料位跟踪自动供料。

Apply vertical lifting,90 degreetransportation, save floor area and reduce powerloss; Adopting bucket type loading material, no scattering, matching with packing machine and multi-head weighing can realize automatic feeding of material level tracking.

Lnclined Belt Conveyer
斜坡网带式提升机众

适用包装范围 APPLICATION

网带式提升输送机，输送量大、流动性好;
采用开发式框架结构、清洁、不宜结灰;
采用变频器控制启动，根据现场物料可调节传送速度。

The belt conveyor has large throughput and good fluidity;Adopt development frame structure, clean and unsuitable ash;Using frequency converter to contral start, adjust transmission speedaccording to site material.

Auger Elevator
螺杆式提升机

适用包装范围 APPLICATION

适用于奶粉、米粉、奶茶粉、淀粉、蛋白粉、调味料、面粉咖啡粉等粉状物料的输送。

Apply for milk powder, rice noodle, milk tea powder, starch,protein powder,seasoning and flour.

Bridge Type Metal Detector
桥式金检机

适用包装范围 APPLICATION

用于检测非金属包装食品或者其它产品，含金属的不良品检测;检测精度可依据金检机具体型号和被检测产品的影响程度而定。

It is used to detect nonmetallic packaged food or other products;The detection accuracy can be determined according to the modelof metal detector and the property of items.

Check Weigher
重量识别秤

适用包装范围 APPLICATION

重量识别秤是以一种在线、高速、高精度的动态重量称重选别系统:该系统在配置接口附件和专用软件后与工厂管理中心进行产品质量数据通信。

Check weigher is a dynamic weighing and screening withon-line,high-speed,high-precision system;The system carries out product quality data and communicatewith the factory management center.

Check Weigher And Matal Detector Combination
金检重检一体机

适用包装范围 APPLICATION

金属检测和重量检测参数配置在同一个产品参数化中，并在同一个界面中操作，减少操作的错误发生率，拥有统一的智慧型学习算法和参数设置，实现金属检测机和重量检测机的真正融合。

Metal detector and check weigher parameters are configured inthe same productparametenzalon,and operated nthe same interaceto reduce the error rate ofoperation, with a unified intelligant learningalgorithm and parameter settings, to achieve the real integrationof metal detector and check weighar.

Product Conveyor
产品输送机

适用包装范围 APPLICATION

采用皮带式输送，可单独使用，也可以与包装机配套完成产品输送;可根据客户提供的数据或现场勘测进行设计，提供先进、合理、经济的整体解决方案;可选用材型、不锈钢、碳钢、PVC皮带、PVC链板等输送。

Use belt conveyance,can use alone, also can complete the productconveyance with packing machine form a complete set;It can be designed according to the data provided by customers or the sitesurvey,and provide advanced,reasonableandeconomical overallsolutions;Optional material type, stainless steel, carbonsteel, P'VC belt, PVC chain plate, etc.

Rotary Table
出料装盘

适用包装范围 APPLICATION

用来周转包装后的产品，便于人工装箱;不锈钢圆盘，底座可按要求制作成不锈钢或碳钢;标准圆盘直径为1000mm;转速及圆盘大小可按实际要求定制。

Its used for turnover packaging after finished products:Stainless steel disc, base can be made as stainless steel or carbon steel;Diameteroftables1000mm;Speed and table size can be customized,

ThermalTransfer Printer
热转印打码机 TTO

适用包装范围 APPLICATION

适于打印高达 300dpi分辨率的高精度图文，条形码;干净环保不存任何发挥性物质;稳定可靠，色带驱动系统基本无需任何保护;节约成本，彻底为包装物省去标签纸等消耗性库存。

Suitable for printing high resolution images and bar codes up to 300dpi resolution;Clean and environmentally friendly without any productive substances;Stable and reliable, the ribbon drive system basically does not require any protection;Save costs and eliminate consumable inventory such as label paper.